




ELEKTRİKLİ ZİNCİRLİ VİNÇLER ELECTRICAL CHAIN HOISTS

MANUEL ŞARYOLU TİP / MANUEL TROLLEY TYPE

500 kg. - 5 TON

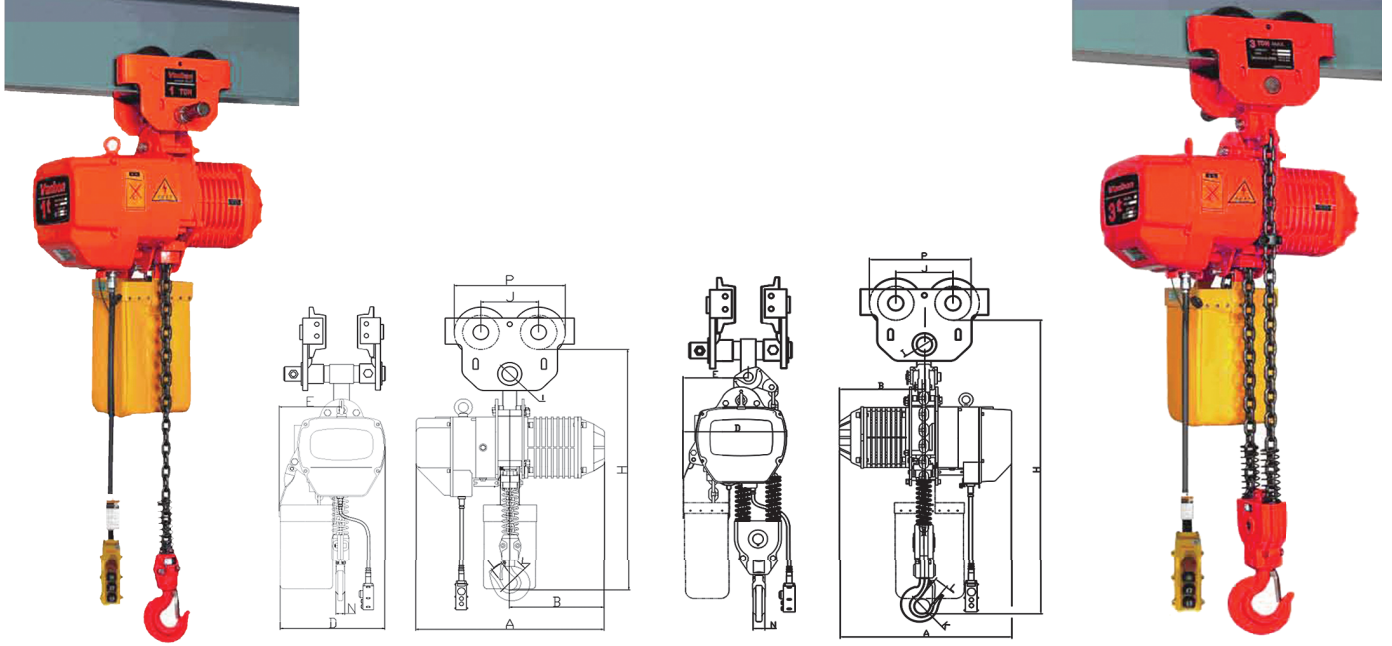

TEKNİK PARAMETRELER / TECHNICAL PARAMETERS

MODEL TYPE	KAPASİTE CAPACITY	KALDIRMA HIZI LIFTING SPEED (m/min.)	KALDIRMA MOTORU / LIFTING MOTOR					DONAM CHAIN FALL	zincir ölçüsü CHAIN SPECIFICATION	TEST YÜKÜ TEST LOAD	I ÖLÇÜSÜ I BEAM	AĞIRLIK WEIGHT	EXTRA MT WEIGHT ADDED WITH 1M. HIGHER
			GÜÇ POWER	DEVİR/DAK. ROTATION SPEED	ENERJİ FAZ PHASES	VOLTAJ VOLTAGE	HZ						
WBH-00501SM	0.5	6.8	0.75	1440	3	200-460	50/60	1	Φ 6.3	0.625	52-100	53	0.81
WBH-01001SM	1	6.6	1.5	1440	3	200-460	50/60	1	Φ 7.1	1.25	52-100	67	1.1
WBH-01002SM	1	3.4	0.75	1440	3	200-460	50/60	2	Φ 6.3	1.25	52-100	67	1.1
WBH-02001SM	2	6.6	3.0	1440	3	200-460	50/60	1	Φ 10.0	2.5	60-105	125	2.3
WBH-02002SM	2	3.3	3.0	1440	3	200-460	50/60	2	Φ 7.1	2.5	60-105	83	2.3
WBH-03001SM	3	5.4	3.0	1440	3	200-460	50/60	1	Φ 11.2	3.75	60-105	138	2.8
WBH-03002SM	3	4.4	3.0	1440	3	200-460	50/60	2	Φ 10.0	3.75	60-105	147	4.7
WBH-05002SM	5	2.7	3.0	1440	3	200-460	50/60	2	Φ 11.2	3.75	82-180	181	5.6

ÖLÇÜ BİLGİLERİ / SIZE SPECIFICATION

MODEL TYPE	H	A	B	D	F	K	L	N	I	J	P
WBH-00501SM	580	460	230	280	160	Φ 35	28	17	Φ 25	91	163
WBH-01001SM	635	520	260	300	176	Φ 40	31	22	Φ 26	90	164
WBH-01002SM	670	460	230	280	205	Φ 40	31	22	Φ 26	90	164
WBH-02001SM	764	615	295	430	265	Φ 47	38	30	Φ 31	115	221
WBH-02002SM	800	520	260	300	236	Φ 47	38	30	Φ 31	115	221
WBH-03001SM	854	615	295	430	265	Φ 58	47	36	Φ 36	138	265
WBH-03002SM	960	615	295	430	320	Φ 58	47	36	Φ 36	138	265
WBH-05002SM	968	520	260	350	205	Φ 58	47	36	Φ 36	138	265
WBH-05002SF	1007	615	295	430	325	Φ 60	48	43	Φ 43	157	304